


# Model 300/600 Installation



# Model 300/600 Installation

- 48"X48"x12"  
Platform Float

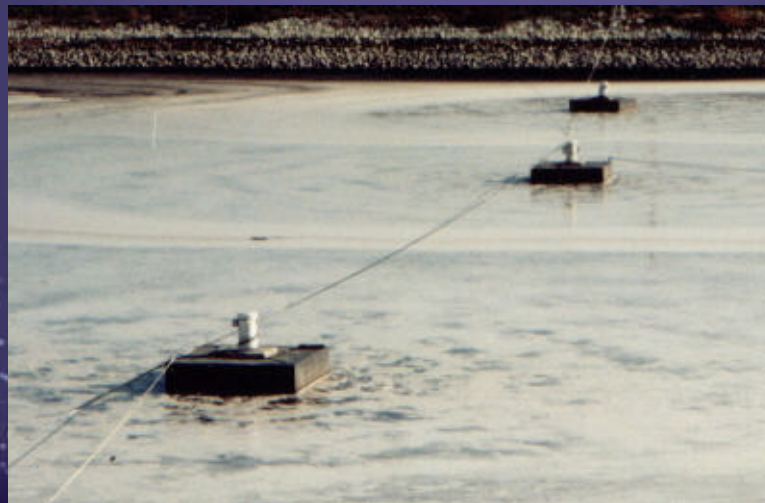

- Wear Plate & Gasket



# Model 300/600 Installation

- Unpack VBT™ and inspect for proper electrical connections



- Place VBT™ on Platform Float with Prop facing out
- Perform “bump test” to test Prop direction



# Model 300/600 Installation

- Connect electrical power & place VBT™ into Platform Float



- Lower onto Wear Plate & move Platform Float into water – be sure VBT™ prop is clear of bottom to run freely
- Start the VBT™ measuring evacuation time and running amperage compared to AAI standard